

YARD TREATMENT

YARD TREATMENT



FEATURES:

- **EXCELLENT PENETRATION:** Due to its unique formula YARD TREATMENT penetrates deep into the wood to provide an excellent bond.
- **BREATHABLE FINISH:** Especially important on green logs while they dry out.
- **UV PROTECTION:** Unique UV absorbers protect the logs from the sun's damaging UV rays.
- **SUITABLE FOR UNSEASONED WOOD:** The unique formula allows for use on wood with higher moisture content (green wood).
- **EASY TO APPLY:** YARD TREATMENT can easily be applied by brush, sprayed and back brushed.
- **EXCELLENT COMPATIBILITY:** YARD TREATMENT is compatible with all Timber Pro products.
- **EASY CLEAN UP:** Soap and water clean up.


YARD TREATMENT *Protects*

- **LOGS THAT ARE SITTING IN THE YARD**
- **LOG STRUCTURES THAT WILL BE COATED AT A LATER DATE**

Timber Pro YARD TREATMENT is a natural-oil waterborne coating with a unique UV absorbing package for the treatment of logs in the process of drying or awaiting final construction.

Timber Pro YARD TREATMENT provides protection of logs for a limited time against greying effects caused by the sun's UV rays.

The thin-film protection will also slow down and reduce the checking associated with rapid moisture loss in the logs during the drying process. The coating will also help reduce the unwanted discolouration associated with fungal and mould growth on the surface.

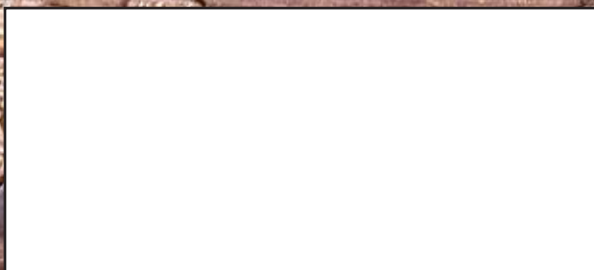

DEALER STAMP

604.270.4244
timberprocoatings.ca
timberprocoatings.com



YARD TREATMENT

Protects

Where to Use

Timber Pro YARD TREATMENT is designed as a treatment to reduce the unwanted discolouration of logs that are green or projects that must sit for months prior to finishing. YARD TREATMENT will offer short-term protection from discolouration from the sun's UV rays, help reduce surface checking and warping associated with rapid moisture loss in the logs.

- Scribe Logs
- Milled Logs
- Fresh Milled Post and Beams

RESTRICTIONS

- Do not apply in direct sunlight or temperatures below 5C (40F) or above 25C (80F)
- Do not apply on surfaces hot to the touch
- Do not apply if rain or freezing temperature is likely to occur within 24 hours
- Do not thin the product
- Do not apply over previously coated surfaces

Application

- Do a test prior to starting the project to ensure wood surface is clean and prepared as required for YARD TREATMENT to absorb into the substrate.
- Stir the material thoroughly before and occasionally during use.
- Generously coat the surface and all end grain. Apply as liberally as possible, let product absorb for a few minutes, then back brush to remove all runs, drips, puddles.
- Always apply YARD TREATMENT starting at one end of a surface, maintaining a wet edge and follow through to the opposite end of the surface.
- YARD TREATMENT is easily applied by brush, HVLP pump or airless sprayer then back brushed or stain pad applicator.
- YARD TREATMENT is designed as a "one-coat" product; apply liberally or use a "wet on wet" application method to ensure total saturation of wood surface.
- Allow 16 to 24 hours dry time before moisture exposure.

Clean Up

Wash with soap/mild detergent and water

Coverage

Smooth wood: 250-300 square feet per gallon.
Rough wood: 150-200 square feet per gallon.
Hardwoods: 300-350 square feet per gallon.
Note: Coverage will vary with the porosity of the wood.

THE COMPLETE LINE OF TIMBER PRO PRODUCTS

Log+Siding
Ultra DF
Roof Treatment
Yard Treatment

Ultra LS
Crystal Urethane
Strip+Brite
EZ PRO

Deck+Fence
Timber Seal
Interior Stain Formula

XP
Clean+Brite

Timber Pro Coatings Canada

Unit 140, 12051 Horseshoe Way, Richmond BC, V7A 4V4
Tel: 604-270-4244 email: canadainfo@timberprocoatings.com

www.TimberProCoatings.ca

www.TimberProCoatings.com